


DATASHEET

19" Rack Frame 24U, Step-Less Adjustable, Max. Load 150 kg

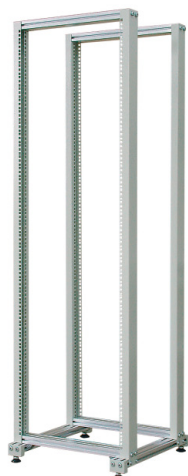

General data

Open rack frame for mounting of 19" components
 Accessibility from all sides for exhibition purposes, laboratory setups and IT installations
 Stable construction, easy assembly
 Mounting depth between 19" levels step-less adjustable from 130 .. 695 mm
 Max. load 150 kg
 Material aluminum profiles (base), steel (19" poles)
 Paint finish steel parts RAL7035, light grey
 Optional castor set PRO-ROL01 please order separately on demand

Variant with max. load 250 kg and mounting depth 711 mm available on request

Allgemeine Daten

| | |
|-------------------|----------------|
| Surface finishing | Powder coating |
| Material | Steel |

Available variants

| ArtNr. | Bezeichnung | Max. Load Capacity | Number of height units | Farbe | Breite | Höhe | Tiefe | RAL-Nummer |
|-----------|--|--------------------|------------------------|-------|--------|---------|--------|------------|
| 691631-24 | 19" Rack Frame 24U, Step-Less Adjustable, Max. Load 150 kg | 150 kg | 24 U | grau | 544 mm | 1177 mm | 786 mm | 7035 |
| 691631-42 | 19" Rack Frame 42U, Step-Less Adjustable, Max. Load 150 kg | 150 kg | 42 U | grau | 544 mm | 1975 mm | 786 mm | 7035 |

This datasheet was created automatically on 27-12-2022 . Technical changes reserved.